

KSH 120 DELUXE
PELLET STOVE



PELLET STOVE




WWW.KOZISTOVES.COM

KSH 120 DELUXE PELLET STOVE

The **KOZI** KSH 120 Deluxe Shop Heater (KSH 120DX) is an economical solution to today's rising heating costs. This economically priced stove is loaded with state of the art safety features, which ensure safe and reliable operation. The easy to use **MX2** Control Board makes operating and trouble-shooting your heater a snap. The heater can be manually operated or controlled with the use of a wall thermostat or remote control. The heater comes with our Glass Screen Saver™ that helps keep your glass clean for long periods of time. The large hopper design can fit up to 120 lbs of pellet fuel and allows your stove to operate up to 100 hours.

STOVE FEATURES

- 10 Tube Heat Exchanger
- Digital Control Board with Trouble-shooting Diagnostics
- Glass Screen Saver™
- Auto Ignition System
- Wall Thermostat and Remote Control Capabilities
- Adjustable Fuel Feed Control
- Circulation Fan Override Safety Device (turns fan on high if stove begins overheating)
- High Temperature Safety Device (turns feed system off if stove reaches high temperature limit)
- Pressure Switch Safety Device (shuts feed mechanism off when a pressure problem is encountered)

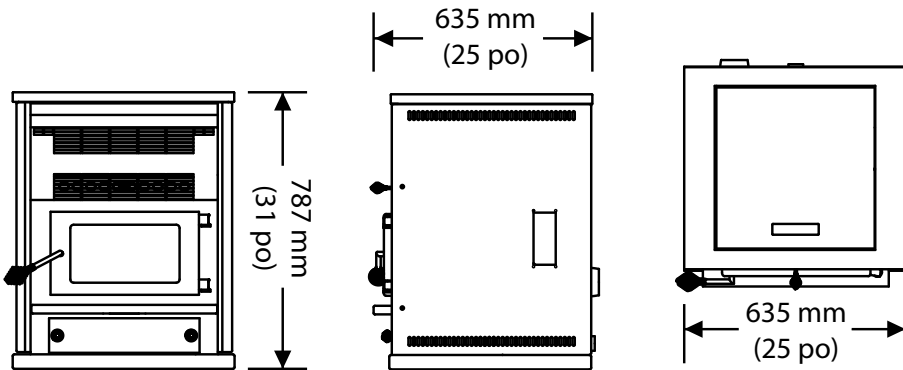

*Design may change at any time without notice or obligation.

APR Industries Ltd., 1354 Waverley Street, Winnipeg, MB., Canada, R3T 0P5

Phone: (204) 452-9907, Fax: (204) 453-2747, Email: mail@kozistoves.com, Website: www.kozistoves.com

STOVE DIMENSIONS

| | |
|---------------------|----------------|
| Width | 25" / 635 mm |
| Depth | 25" / 635 mm |
| Height | 31" / 787 mm |
| Flue Diameter | 3" / 75 mm |
| Air Intake Diameter | 1.625" / 41 mm |

STOVE SPECIFICATIONS

| | |
|-------------------------|------------------|
| Weight | 225 lbs / 103 kg |
| Fuel Capacity | 120 lbs / 54 kg |
| Burn Time | 26 - 100 hours |
| Max Input/Hr | 40,000 BTU |
| Electrical Requirements | 120 V, 5 A |
| EPA Status | Exempt |
| Mobile Home | Approved |

CLEARANCES TO COMBUSTIBLES

| | |
|------------------------|---------------|
| Side of Unit | 5" / 125 mm |
| Rear of Unit | 1" / 25 mm |
| Corner of Unit | 1" / 25 mm |
| Alcove Height | 48" / 1220 mm |
| Alcove Width | 34" / 864 mm |
| Alcove Depth (Maximum) | 30" / 762 mm |



Intertek



Printed In Canada